

MK6

全新设计

伺服驱动注塑机
技术参数(88-568吨)

新一代

精密 稳定

力求完美

202206



扫一扫
探索更多

震雄集团


香港新界大埔工业邨大宏街13至15号
marketing@chenhsong.com
400 930 0026
chenhsong.com.cn/mk6

技术参数


		JM88-MK6			JM128-MK6			JM168-MK6			JM208-MK6			JM258-MK6			JM328-MK6			JM398-MK6			JM468-MK6			JM568-MK6		
射胶部份																												
螺杆直径	mm	31	36	41	36	41	46	41	46	52	46	52	60	46	52	60	60	67	75	67	75	83	75	83	90	75	83	90
螺杆长径比	L/D	24.4	21.0	18.4	23.9	21.0	18.7	23.6	21.0	18.6	23.7	21.0	18.2	23.7	21.0	18.2	23.5	21.0	18.8	23.5	21.0	19.0	23.2	21.0	19.4	23.2	21.0	19.4
螺杆行程	mm	180			205			230			260			260			335			375			415			415		
射胶容积	cm ³	136	183	238	209	271	341	304	382	488	432	552	735	432	552	735	947	1181	1480	1322	1657	2029	1833	2245	2640	1833	2245	2640
射胶量(PS)	g	124	167	216	190	246	310	276	348	444	393	502	669	393	502	669	862	1075	1347	1203	1508	1846	1668	2043	2403	1668	2043	2403
	oz	4.4	5.9	7.6	6.7	8.7	10.9	9.7	12.3	15.7	13.9	17.7	23.6	13.9	17.7	23.6	30.4	37.9	47.5	42.4	53.2	65.1	58.9	72.1	84.7	58.9	72.1	84.7
射胶压力(最大)	kgf/cm ²	2549	1890	1457	2451	1890	1501	2368	1881	1472	2419	1893	1422	2419	1893	1422	2355	1889	1507	2333	1862	1520	2253	1840	1564	2253	1840	1564
射胶速率	cm ³ /s	80	108	140	104	135	170	138	174	222	169	216	287	169	216	287	302	376	472	351	440	539	442	541	636	442	541	636
螺杆最大转速	rpm	245			245			224			200			200			200			190			180			180		
射咀推力(最大)	t	4.2			4.2			6.2			6.2			6.2			9.1			11.1			11.1			12		
射咀行程	mm	275			290			330			380			380			440			470			540			420		
锁模部份																												
锁模力(最大)	t	88			128			168			208			258			328			398			468			568		
开模行程	mm	340			380			450			510			560			660			720			820			870		
导柱内距(水平*垂直)	mm	360*360			410*410			470*470			530*530			580*580			680*680			730*730			830*830			860*860		
容模量(最薄-最厚)	mm	125-380			150-450			170-520			180-550			190-580			225-680			250-730			300-850			350-880		
模板最大距离	mm	720			830			970			1060			1140			1340			1450			1670			1750		
顶针推力	t	3.4			3.4			4.2			6.7			6.7			11.1			11.1			16.6			16.6		
顶针行程	mm	120			120			140			150			150			180			215			220			250		
定位法兰	mm	100			125			125			160			160			160			160			200			200		
电力/电热																												
系统压力	kgf/cm ²	175			175			175			175			175			175			175			175			175		
油泵电机功率	kW	14			17			22			30			30			48			60			72			72		
电热量	kW	8			10.3			12.9			16.6			16.6			26			31.1			35.5			35.5		
温度控制区		3+1			3+1			3+1			3+1			3+1			4+1			5+1			5+1			5+1		
其它																												
机身尺寸(长*宽*高)	m*m*m	4.46*1.19*1.8			4.93*1.27*1.83			5.47*1.3*1.89			6.09*1.5*1.97			6.28*1.58*2.01			7.44*1.78*2.09			8*1.93*2.28			8.78*2.03*2.3			9.5*2*2.1		
油箱容积	liter	160			200			250			330			330			580			760			850			850		
机重(约)	t	3.27			4			4.94			6.8			7.8			13.2			16.7			19.8			21		

模板尺寸

模模孔

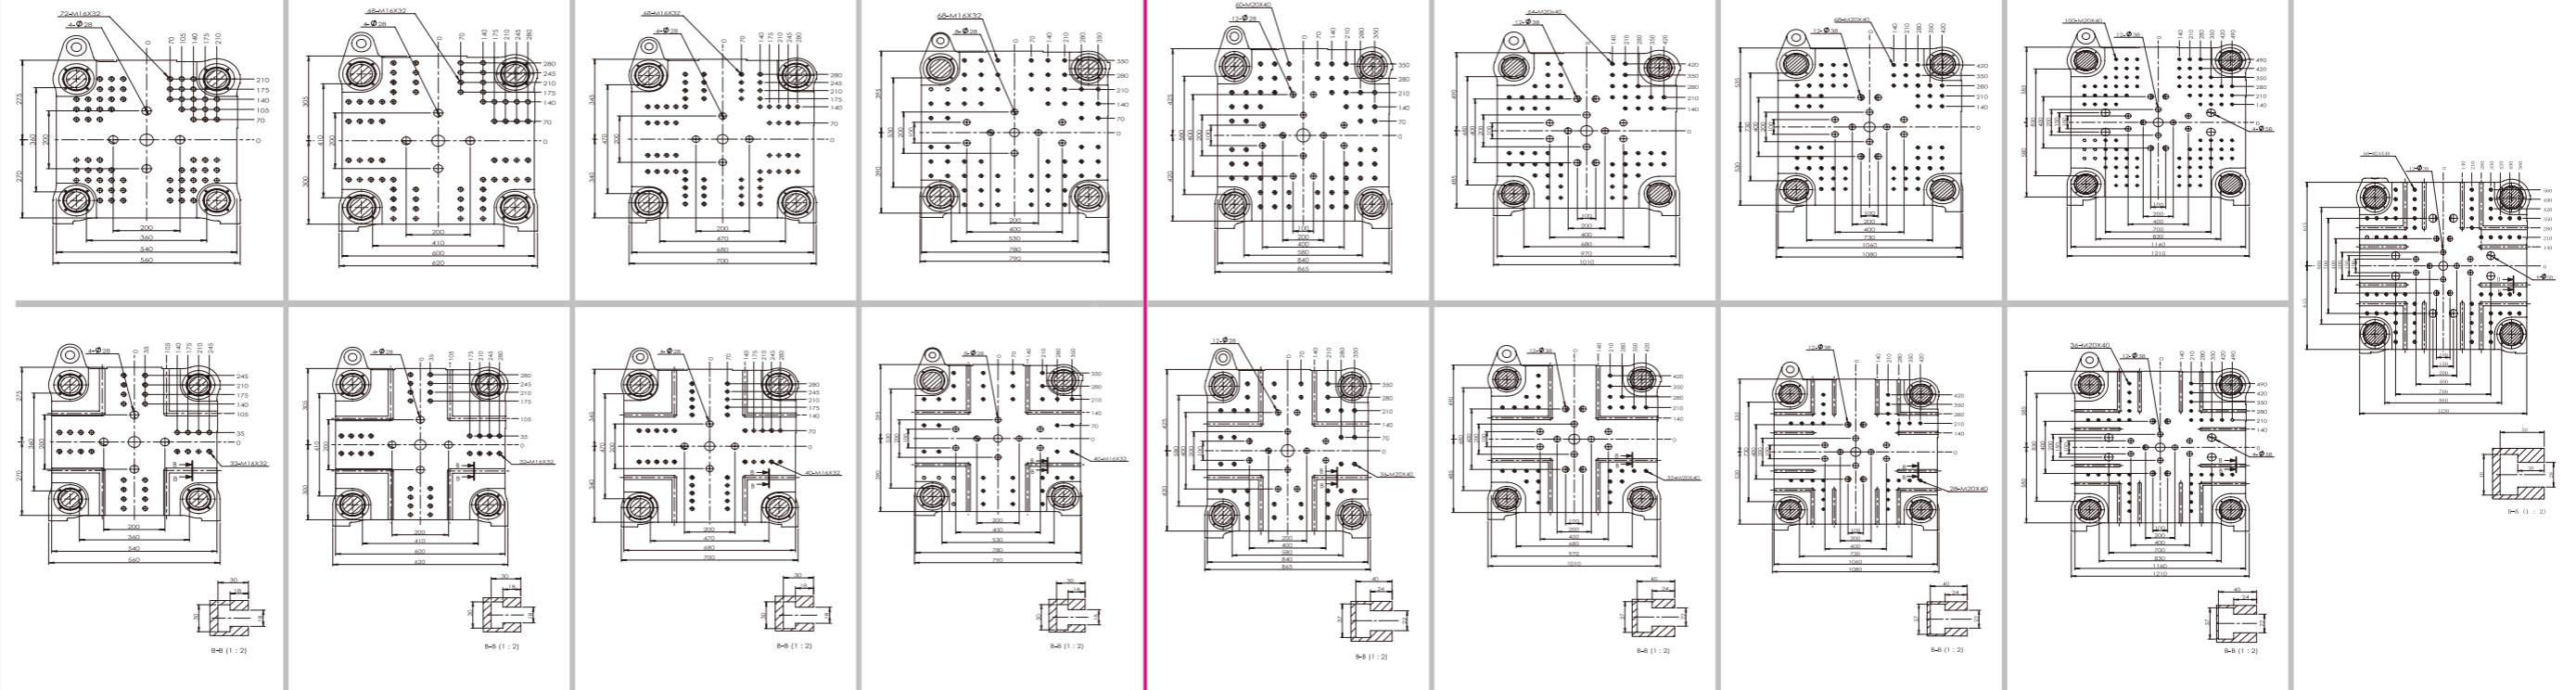

T型槽加码模孔(选配)

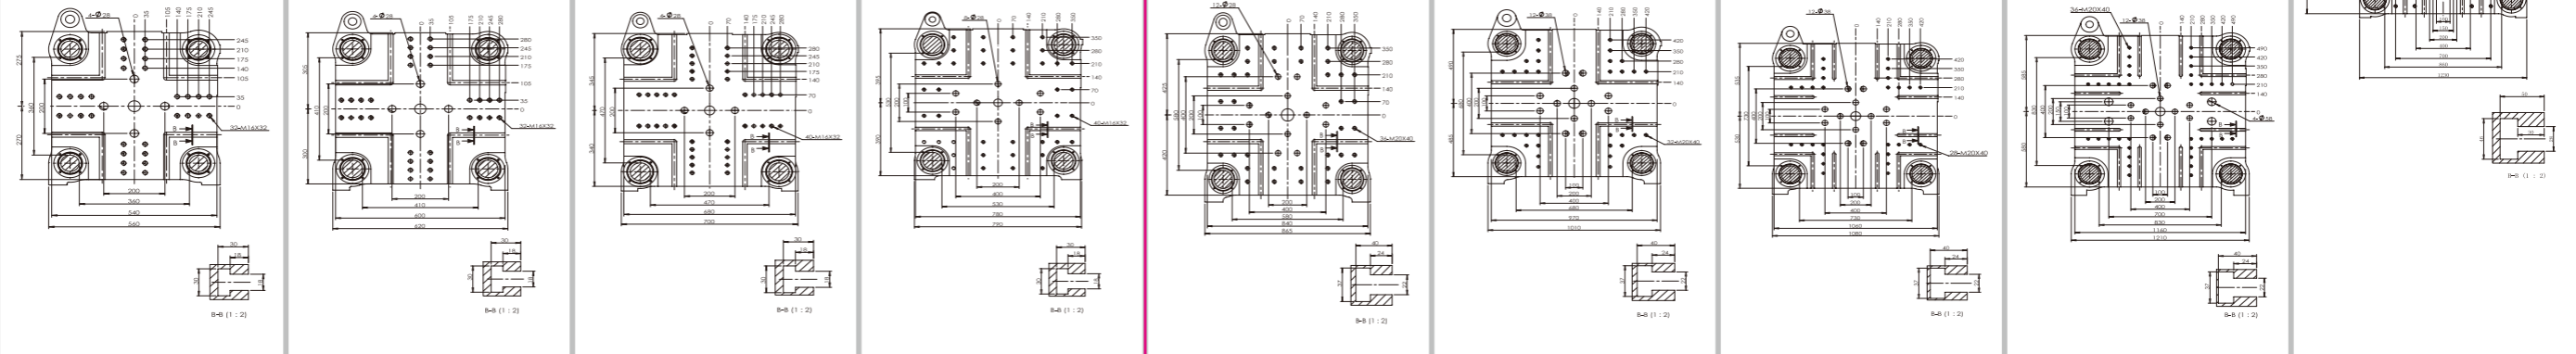

*以上技术参数仅供参考，在不同情况下可能出现偏差。本公司不断进行产品提升，故保留更改产品规格与参数而不另行通知的权利，本规格表的最终解释权归本公司所有。